

PRECISION BOLTING FOR OVER **20 YEARS**

LIGHTER
FASTER
STRONGER

PRODUCT **CATALOGUE**



RAD TORQUE SYSTEMS

TABLE OF CONTENT

PNEUMATIC

RAD DX SERIES	5
RAD HIGH SPEED SERIES	6
RAD CLASSIC SERIES	7
RAD TV SERIES	8
WHEEL NUT BOLTING & OTR MINING SERIES	9

ELECTRONIC

E-RAD BLU SERIES	11
------------------	----

SMART SOCKETS

SMART SOCKET SERIES	13
---------------------	----

DIGITAL BATTERY AND ELECTRIC

DIGITAL BATTERY SERIES	15
DIGITAL V-RAD SERIES	17

BATTERY AND ELECTRIC

B-RAD SELECT SERIES	19
V-RAD SERIES	19

ACCESSORIES

REACTION ARMS & CALIBRATION	21
-----------------------------	----

SAFETY ACCESSORIES

RAD SAFETY ACCESSORIES	23
PRODUCT REFERENCE CHART	25

Precision Bolting for
over 20 Years

COMPANY PROFILE



Welcome to RAD Torque Systems. We are the leading Canadian manufacturer of extreme torque equipment, which includes pneumatic, battery powered, and electronic pistol grip torque wrenches. With more than 21 years in the industry, we're proud to say that we're Canadian owned and operated. We manufacture all of our tools in Abbotsford, BC, which gives us greater control over every piece that goes into our products. We don't just give you a great tool; we ensure its quality from conception through to production and even years after its initial use. The RAD Torque Systems philosophy has proven to be successful all over the world in such industries as oil & gas, petrochemical, mining, aerospace, power generation and manufacturing.

Our parent company, New World Technologies Inc., continues to invest in and employ the latest technology to achieve the highest level of innovation, quality, and performance - which has resulted in multiple patents. New World's extensive in-house machining facilities ensure maximum flexibility and responsiveness enabling quick deliveries and customer satisfaction.

RAD TORQUE SYSTEMS:

- 14 CNC Machining Centers (Okuma and HAAS Systems)
- 10 Gear Cutting Machines (Working to AGMA Standards)
- CAD and CAM Processing (Solid Works and Master Cam)
- 10 Professional Engineers (Mechanical and Electronics)
- Multiple Offices & Worldwide Distribution
- ISO 17025 Accreditation (Cert # L-2325 Calibration)
- Built for Maximum Flexibility and Responsiveness
- New Research & Development Facility (Phantom Works)



With continuous dedication to accuracy and precision, New World Technologies Inc is an **ISO 17025 accredited calibration laboratory.**

PNEUMATIC SERIES



All RAD Pneumatic tools include:

- Reaction arm & retaining ring
- Tool holder with FRL unit, 12' hose and fittings
- Safety instruction CD-ROM & operators manual
- Calibrated to ISO 17025 standards



PATENTED TECHNOLOGY
PRECISION DESIGN
LIGHTWEIGHT + ERGONOMIC

RAD DX SERIES

Extreme duty torque wrenches for heavy duty applications!
Also available with built-in transducers - visit the RAD TV Series!


More than 20 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD DX series. Designed for extreme duty use in a variety of industries worldwide, RAD DX series torque wrenches offer:

- The ultimate in power-to-weight ratio
- Wide torque range to suit multiple applications
- Unmatched reliability delivered by one of the most advanced engineered gear boxes on the market
- Controlled torque - accuracy of +/- 4% and repeatability of +/- 2%



FRL Unit:

- Low weight tool holder made from high-density polypropylene
- Includes pressure gauge, filter, regulator and oiler

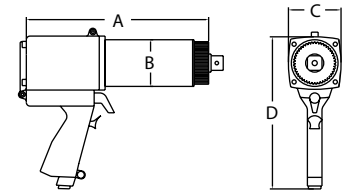

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH							
12814	7GX	0.75"	100	700	30	8.0	80 db	9.0"	2.5"	2.75"	9.0"
12818	10GX	0.75"	200	1000	20	8.0	80 db	8.15"	2.5"	2.75"	8.07"
17328	15DX	1.0"	300	1500	10	8.6	80 db	8.0"	2.7"	2.75"	8.1"
12377	25GX	1.0"	500	2500	9	13.5	85 db	9.7"	3.1"	3.3"	9.5"
22238	30DX	1.0"	900	3000	8	14.8	85 db	10"	3.2"	3.3"	9.5"
12356	*34GX	1.0"	1000	3400	12	20.0	85 db	12.5"	3.4"	3.7"	10.8"
15328	60DX	1.5"	2000	6000	6.6	27.6	85 db	13.7"	4.0"	4.0"	10.9"
18558	80DX	1.5"	2500	8000	4	30.5	85 db	12.15"	4.25"	4.25"	10.65"
12383	85GX	1.5"	3000	8500	4.5	38.5	85 db	17.0	4.5"	4.5"	11.0"

Accuracy of +/-4%, Repeatability of +/-2%

RAD HIGH SPEED SERIES


Extreme duty torque wrenches with high RPM productivity

RAD High Speed series torque wrenches incorporate a precision-engineered high-speed gearbox designed for faster run down and quick reaction point positioning on time sensitive bolting applications.

- The two-speed models feature a unique full automatic gearbox design, eliminating the time consuming switch between high and low speed gear.

FRL Unit:

- Low weight tool holder made from high-density polypropylene
- Includes pressure gauge, filter, regulator and oiler

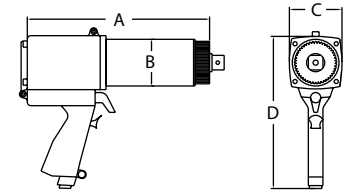

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH							
10644	10GX-2	0.75"	350	1000	85	9.9	80 db	10.3"	2.5"	2.75"	8.1"
17068	15DX-2	1.0"	500	1500	50	10.5	80 db	9.9"	2.7"	2.75"	8.1"
19773	25GX-2	1.0"	700	2500	44	16.6	80 db	12.0"	3.1"	3.3"	10.0"

Accuracy of +/-4%, Repeatability of +/-2%


RAD CLASSIC SERIES

Controlled torque: accuracy of +/-4% and repeatability of +/-2%
ADVANCED TORQUE

RAD Classic series torque wrenches offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners in a variety of industries that require accuracy, power, and safety.

FRL Unit:

- Low weight tool holder made from high-density polypropylene
- Includes pressure gauge, filter, regulator and oiler

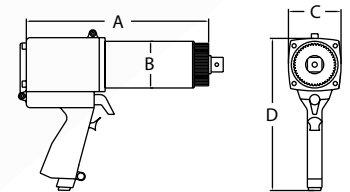

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH							
12316	350SL	0.75"	50	350	65	6.0	80 db	6.6"	2.4"	2.75"	8.75"
12342	1800NG	1.0"	500	1800	13	12.5	85 db	9.0"	3.0"	3.3"	9.5"
12357	50	1.5"	1500	5000	8	28.0	85 db	13.9"	4.0"	3.7"	10.4"

Accuracy of +/-4%, Repeatability of +/-2%

RAD TRANSDUCER VERIFICATION SERIES


RAD Pneumatic torque wrench with a built in transducer for verification and traceability! With strain gauge technology, you can record every bolt cycle.

The RAD TV series solves an ongoing problem in the bolting industry: incorrect air supply and wrong tool operation can cause differences in torque output of your tools. With RAD's TV wrench, the operator gets a clear visual indication whether the actual torque is deviating from the set target torque, therefore reducing errors in the bolting process. At the same time very high torque accuracy can be achieved when using the real time Bluetooth torque-graphing mode.

- Easy data logging and collection
- Pass or Fail indicator light on the tool
- Bluetooth connectivity to your smart phone or tablet
- Controlled torque - accuracy of +/-1% on transducer

FRL Unit:

- Low weight tool holder made from high-density polypropylene
- Includes pressure gauge, filter, regulator and oiler

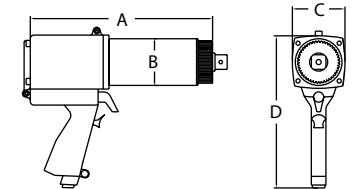

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH							
21953	7GX-R TV	0.75"	300	700	30	12	80 db	12.5"	2.5"	2.75"	9.0"
22076	10GX TV	0.75"	200	1000	20	8.0	80 db	9.5"	2.5"	2.75"	8.07"
22885	15DX TV	1.0"	300	1500	10	8.6	80 db	9.2"	2.7"	2.75"	8.1"
21357	34GX TV	1.0"	1000	3400	12	20	85 db	13.5"	3.4"	3.7"	10.5"

Accuracy of +/-4%, Repeatability of +/-2%

RAD WHEEL NUT & OTR MINING SERIES

Accidents caused by incorrectly tightened wheel nuts are a serious problem. That's why the RAD Wheel Nut Bolting series was designed with one job in mind: wheel nut bolting where torque control is a must.


RAD planetary gear torque wrenches are vibration free and have the accuracy to prevent accidental under- and over-tightening. The nose extensions are ideal for reaching wheel nut studs that are recessed and have tight clearances.

- Removable custom reaction arms designed to fit virtually on any wheel configuration
- Extended reaction point for safe and quick operation
- Accuracy to ensure correct tightened wheels



The nose extension (-R) Developed exclusively for extreme duty maintenance of mining haul trucks from 50-400 ton capacities and front-end loaders. The extended nose allows safe access of virtually all wheel configurations found on today's heavy equipment.

The nose extension kit (-NX) Designed with flexibility in mind. Complete with 3 different reaction arms and a nose extension for hard-to-reach areas, the NX Kit is a "go anywhere" tool capable of a variety of applications but especially suitable for off-road construction equipment.

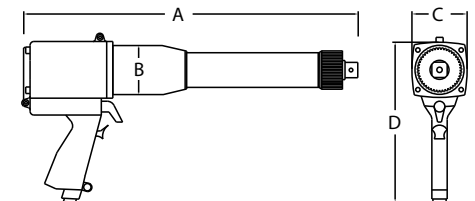

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D	DIMENSION E
			LOW	HIGH								
13495	7GX-R	0.75"	300	700	115	12.0	80 db	14.5"	2.5"	2.0"	2.75"	9.0"
13691	10GX-NX	0.75"	200	1000	20	8.0	80 db	8.15"	2.5"	n/a	2.75"	8.07"
20810	15NDX-R	1.0"	300	1500	10	16.0	80 db	21.35"	2.7"	2.7"	2.75"	8.02"
19339	15DX-NX	1.0"	300	1500	10	8.6	80 db	8.0"	2.7"	n/a	2.75"	8.1"
13477	1800NGX-R	1.0"	500	1800	10	27.5	85 db	21.5"	3.0"	2.0"	3.3"	9.5"

Accuracy of +/-4%, Repeatability of +/-2%

ELECTRONIC SERIES



All E-RAD BLU Tool Kits Include:

- Reaction arm & retaining ring
- E-RAD Tool Handle
- E-RAD Touch Controller
- Single 15' Cable
- Calibrated to ISO 17025



ADVANCED ELECTRONICS
HIGH DEGREE OF ACCURACY
DATA COLLECTION

E-RAD **BLU** SERIES

Ability to use different handles per controller case!


The system of choice for the wind industry, the E-RAD BLU precision torque wrench tools are designed to provide a high degree of accuracy (+/- 2.8%) and repeatability (+/- 2%). Using a patented gearbox design and the precision of an electric AC Servo motor, these tools deliver smooth continuous torque. Best of all, it's the most affordable system on the market.



E-RAD BLU TOUCH CONTROL CASE

The touch screen control case provides an easy to use interface that allows for pre-selectable presets, quick error-free torque and angle adjustments, complete recalibrations as well as data logging everything for easy export into spreadsheets on your laptop.

RAD SMART SOCKETS can connect to the E-RAD BLU tool via Bluetooth technology. This combination allows you to automatically calibrate your E-RAD BLU to any joint!

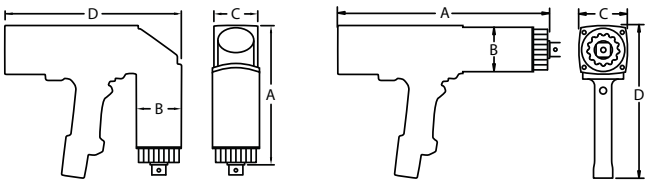

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		WEIGHT (lbs.)	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH					
21980	E-RAD BLU 700	0.75"	100	700	12	13.25"	2.5"	3.0"	8.25"
24161	E-RAD BLU 1500	1.0"	200	1500	13	13.28"	2.7"	3.0"	8.25"
21981	E-RAD BLU 2500 COMP	1.0"	250	2500	18	14.8"	3.0"	3.0"	8.25"
24221	E-RAD BLU 2500 COMP - 90 Degree	1.0"	250	2500	18	9.65"	3.0"	3.1"	8.25"
21982	E-RAD BLU 3000	1.0"	500	3000	23.5	16.75"	3.4"	3.5"	8.75"
21983	E-RAD BLU 6000	1.5"	1500	6000	29	16.5"	4.0"	3.5"	8.75"
21984	E-RAD BLU 7500	1.5"	1500	7500	33	17.0"	4.25"	4.25"	9.14"

Accuracy of +/-3%, Repeatability of +/-2%

SMART SOCKETS™



All RAD Smart Sockets Include:

- Weatherproof storage case
- Plug & USB cord
- Calibration certificate to ISO 17025



INSTANT TORQUE READ-OUT
REVOLUTIONARY
MEASURING SOCKET

RAD SMART SOCKET™ SERIES

Instant torque read-out of your live application!
Strain gauge technology measures torque applied to bolt. Patented Product.

The RAD Smart Socket™ series use RAD Torque's transducer technology combined with a custom socket to measure the actual torque applied to the bolt during a torque cycle. By innovative design, the Smart Socket™ is no larger than a standard socket. Its compact size and innovative technology makes the Smart Socket™ a perfect audit tool for inspecting bolted joints and it can function as a master calibration for various torque tools.

- Measures and displays peak torque
- Full data collection - export to email by PDF, XLS, CSV
- View in real time via Bluetooth onto your smartphone or tablet
- Transducer accuracy of +/-1%



PART NUMBER	SMART SOCKET MODEL	TORQUE (FT.)		DRIVE SIZE	WEIGHT (lbs.)	DIMENSION	
		LOW	HIGH			HEIGHT	DIAMETER
20879	33mm SMART SOCKET™	150	1500	3/4"	2.65	3.94"	2.83"
21363	36mm SMART SOCKET™	150	1500	1"	2.65	3.94"	2.83"
22158	41mm SMART SOCKET™	150	1500	1"	2.65	3.42"	2.83"
20880	46mm SMART SOCKET™	150	1500	1"	2.65	3.42"	2.83"
20881	50mm SMART SOCKET™	300	3000	1"	3.20	3.50"	3.40"
20882	55mm SMART SOCKET™	300	3000	1"	3.20	3.50"	3.40"
20883	60mm SMART SOCKET™	300	3000	1"	3.20	3.50"	3.40"
20394	65mm SMART SOCKET™	800	8000	1"	8.7	4.75"	4.53"
20884	70mm SMART SOCKET™	800	8000	1.5"	8.7	4.75"	4.53"
20885	80mm SMART SOCKET™	800	8000	1.5"	8.7	4.75"	4.53"

Accuracy of +/-1%

DIGITAL BATTERY SERIES



Each Digital B-RAD Tool Include:

- Reaction arm and retaining ring
- Charger and two 18V batteries
- Weatherproof storage case
- Calibrated to ISO 17025 standards
- Safety instruction CD
- Operators Manual




WORLD'S FIRST DIGITAL **BATTERY POWERED** TORQUE WRENCH

DIGITAL B-RAD BATTERY SERIES

Ideal for applications where compressed air is not available!
Up to 2 times faster than previous version!

The Digital B-RAD powered torque wrenches are the world's first digital, cordless, and lithium-ion battery tool on the market. With advanced patented technology containing digital display and single increment torque settings.

- Programmable Preset Torque Settings
- Latest lithium-ion 18V battery technology
- High accuracy of +/-5%
- Automatic 2-speed gearbox
- Patented Product

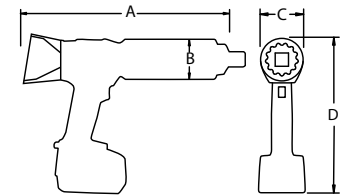

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH							
21779	DB-RAD 500-2	0.75"	100	500	59	11.0	80 db	12.67"	2.5"	2.5"	10.25"
21783	DB-RAD 1000-2	0.75"	250	1000	19	11.6	80 db	13"	2.5"	2.5"	10.25"
21787	DB-RAD 1500-2	1.0"	500	1500	17	11.8	80 db	13"	2.7"	2.7"	10.50"

Accuracy of +/-5%, Repeatability of +/-2%

DIGITAL ELECTRIC SERIES



All Digital V-RAD Tools Include:

- Reaction arm & retaining ring
- Weatherproof storage case
- Safety instruction CD-ROM & operators manual
- Calibrated to ISO 17025 standards




LIGHTWEIGHT + COMPACT ELECTRIC POWERED TORQUE WRENCH

DIGITAL V-RAD ELECTRIC SERIES

Electric Powered

Digital V-RAD series torque wrenches are the extreme design innovation with fully programmable preset torque settings with torque range up to 2500 ft. lbs. Smooth continuous flow of controlled torque with single increment torque settings.

- Digital display with colour screen
- Single increment digital torque settings
- Multilevel password protection
- Electronic bolt counter
- Patented legendary gearbox design
- "Pass/Fail" function
- Available in 110V and 220V version

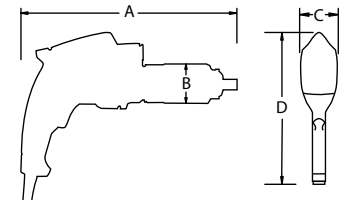

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH							
16120	DV-RAD 1000	0.75"	400	1000	7.7	11.4	80 db	12.66"	2.5"	2.75"	8.65"
16121	DV-RAD 1500	1.0"	600	1500	5.8	12.0	80 db	13.5"	2.7"	2.75"	8.65"
16122	DV-RAD 2500	1.0"	1000	2500	3.2	13.6	80 db	14.95"	3.1"	2.75"	8.65"

Accuracy of +/-5%, Repeatability of +/-2%

BATTERY AND ELECTRIC SERIES



EASILY SELECTABLE
TORQUE SETTINGS USING
TWO SIMPLE BUTTONS

B-RAD SELECT SERIES

NEW! Now with digital torque settings.

Torque ranges up to 3,000 ft. lbs!

The newly designed B-RAD Select Series offers unmatched power, versatility, and reliability while incorporating a new torque display with buttons. The B-RAD Select allows the user to easily select the target torque. Patented Product.



V-RAD SELECT SERIES

Quick adjust torque settings.

Equal power in forward and reverse.

V-RAD Select electric series are a new generation of electric torque wrenches used for the installation or removal of heavy duty fasteners where accuracy, power, and safety are required. Quick adjust torque settings. Equal power in forward and reverse.



B-RAD Select Series

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH						
24501	TOOL KIT B-RAD SELECT 500	0.75"	125	500	13	7.6	9.25"	2.5"	2.65"	10.25"
24502	TOOL KIT B-RAD SELECT 500-2	0.75"	150	500	58	9.2	11.25"	2.5"	2.65"	10.25"
24503	TOOL KIT B-RAD SELECT 1000	0.75"	200	1000	6	8.2	10.00"	2.5"	2.65"	10.25"
24504	TOOL KIT B-RAD SELECT 1000-2	0.75"	200	1000	20	10	11.88"	2.5"	2.65"	10.25"
24505	TOOL KIT B-RAD SELECT 1500	1.0"	300	1500	9.2	8.9	9.75"	2.7"	2.7"	10.25"
24506	TOOL KIT B-RAD SELECT 1500-2	1.0"	300	1500	18	10.7	13.00"	2.7"	2.7"	10.25"
24281	TOOL KIT B-RAD SELECT 3000	1.0"	600	3000	2	13	11.00"	3.2"	3.2"	10.25"

V-RAD Select Series

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (FT.)		RPM	WEIGHT (lbs.)	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
			LOW	HIGH						
25627	TOOL KIT V-RAD SELECT 500	0.75"	50	500	9.5	9.5	7.6"	11.90"	2.5"	2.75"
25628	TOOL KIT V-RAD SELECT 1000	0.75"	100	1000	5.5	11	12.65"	2.5"	2.75"	8.65"
25629	TOOL KIT V-RAD SELECT 1500	1.0"	150	1500	5.5	12	13.5"	2.5"	2.75"	8.65"
25630	TOOL KIT V-RAD SELECT 2500	1.0"	250	2500	3.5	13.5	14.95"	2.5"	2.75"	8.65"

Accuracy of +/-5%, Repeatability of +/-2%

REACTION ARMS & CALIBRATION



All RAD Transducer Systems include:

- RAD transducer
- Calibration plate
- Joint simulator
- Socket and reducer
- Tablet with RAD calibration software
- ISO 17025 accredited calibration certificate

HIGHLY ACCURATE
+ REPEATABLE PRECISION
TRANSDUCERS


RAD REACTION ARMS

Each RAD tool includes a standard reaction arm. In addition to this, you can order the below special reaction arms to ensure correct reaction for different applications. Please consult our website for dimensions and part numbers.

Standard
Reaction Arm



Deep Socket
Reaction Arm




Double Ended
Reaction Arm



RAD TRANSDUCER SERIES

The RAD Transducer Series have earned their place in calibration laboratories worldwide because of their high accuracy and repeatability.

- Ranges up to 7,000 ft. lbs
- Screen on transducer allows for convenient reading
- Connect to RAD Calibration Software via your computer or tablet
- Up to 1,500 ft. lbs classified to BS 7882:2008 as Class 1 or better for the primary range (+/-0.5% of reading from 20% to 100% of full scale)
- Backward compatible with previous RAD calibration benches.



RAD
Transducer Series

PART NUMBER	DESCRIPTION	TORQUE (FT.)		DRIVE SIZE	WEIGHT (lbs.)	DIMENSION A	DIMENSION B	DIMENSION C
		LOW	HIGH					
23442	RAD 1500 TRANSDUCER	75	1500	1.0"	4.0	5.6"	2.35"	2.7"
23443	RAD 3500 TRANSDUCER	175	3500	1.5"	10.0	6.75"	2.5"	4.0"
23444	RAD 7000 TRANSDUCER	350	7000	1.5"	11.0	6.75"	2.5"	4.0"

SAFETY ACCESSORIES



LEADING THE
BOLTING INDUSTRY
IN SAFETY

RAD

SAFETY ACCESSORIES

Ergonomics and safety are very important during the design phase of any new RAD tool. In addition to making the job more ergonomic and safe, we want our tools to be easy to use, powerful, accurate and very reliable. RAD believes safety features should not impede workplace efficiency and speed, but should make workers aware of the risks involved in working with powerful tools. RAD has developed a range of ergonomic and safety enhancing features.

Ergonomic features:

- RAD's patented planetary gear reduction drive system delivers 88 times less vibration than impact wrenches.
- No risk of HAVS injuries (Hand-Arm-Vibration-Syndrome). Lower risk than impact wrenches.
- Pistol grip trigger/control reduces operator error.
- RAD's low profile reaction arm eliminates all operational load on the operator.

Hand Guards



Trigger Guard



Reaction Arms



RAD

NOSE EXTENSIONS

Available for most RAD models. Please contact us for custom inquiries.



PRODUCT REFERENCE CHART



PNEUMATIC SERIES: RAD DX

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
12814	7GX	0.75"	100-700 ft/lbs.	30	8.0 lbs.
12818	10GX	0.75"	200-1000 ft/lbs.	20	8.0 lbs.
17328	15DX	1.0"	300-1500 ft/lbs.	10	8.6 lbs.
12377	25GX	1.0"	500-2500 ft/lbs.	9	13.5 lbs.
22238	30DX	1.0"	900-3000 ft/lbs.	8	14.8 lbs.
12356	34GX	1.0"	1000-3400 ft/lbs.	12	20.0 lbs.
15328	60DX	1.5"	2000-6000 ft/lbs.	6.6	27.6 lbs.
18558	80DX	1.5"	2500-8000 ft/lbs.	4	30.5 lbs.
21984	85GX	1.5"	2500-8000 ft/lbs.	4.5	38.5 lbs.

ELECTRONIC SERIES - E-RAD BLU

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
21980	E-RAD BLU 700	0.75"	100-700 ft/lbs.	20	12.0 lbs.
24161	E-RAD BLU 1500	1.0"	200-1500 ft/lbs.	8	13.0 lbs.
21981	E-RAD BLU 2500 COMP	1.0"	250-2500 ft/lbs.	5.5	18.0 lbs.
24221	E-RAD BLU 2500 COMP 90	1.0"	250-2500 ft/lbs.	6	18.0 lbs.
21982	E-RAD BLU 3000	1.0"	500-3000 ft/lbs.	5.5	23.5 lbs.
21983	E-RAD BLU 6000	1.5"	1500-6000 ft/lbs.	4	29.0 lbs.
21984	E-RAD BLU 7500	1.5"	1500-7500 ft/lbs.	1.5	33.0 lbs.

BATTERY SERIES: B-RAD SELECT

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
24501	B-RAD 500 SELECT	0.75"	125-500 ft/lbs.	13	8.4 lbs.
24502	B-RAD 500-2 SELECT	0.75"	150-500 ft/lbs.	58	10.4 lbs.
24503	B-RAD 1000 SELECT	0.75"	200-1000 ft/lbs.	6	8.8 lbs.
24504	B-RAD 1000-2 SELECT	0.75"	200-1000 ft/lbs.	20	10.8 lbs.
24505	B-RAD 1500 SELECT	1.0"	300-1500 ft/lbs.	4	9.2 lbs.
24506	B-RAD 1500-2 SELECT	1.0"	300-1500 ft/lbs.	18	11.2 lbs.
24281	B-RAD 3000 SELECT	1.0"	600-3000 ft/lbs.	2	13.0 lbs.

ELECTRIC SERIES: DIGITAL V-RAD

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
16120	DV-RAD 1000	0.75"	400-1000 ft/lbs.	7.7	11.4 lbs.
16121	DV-RAD 1500	1.0"	600-1500 ft/lbs.	5.8	12.0 lbs.
16122	DV-RAD 2500	1.0"	1000-2500 ft/lbs.	3.2	13.6 lbs.

PNEUMATIC SERIES: CLASSIC

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
12316	350SL	0.75"	50-350 ft/lbs.	65	6.0 lbs.
12342	1800NG	1.0"	500-1800 ft/lbs.	13	12.5 lbs.
12357	50	1.5"	1500-5000 ft/lbs.	8	28.0 lbs.

PNEUMATIC SERIES: WHEEL NUT & OTR MINING

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
13495	7GX-R	0.75"	300-700 ft/lbs.	115	12.0 lbs.
13691	10GX-NX	1.0"	200-1000 ft/lbs.	20	8.0 lbs.
20810	15NDX-R	1.0"	300-1500 ft/lbs.	10	16.0 lbs.
19339	15DX-NX	1.0"	300-1500 ft/lbs.	10	8.6 lbs.
13477	1800NGX-R	1.0"	500-1800 ft/lbs.	10	27.5 lbs.

BATTERY SERIES: DIGITAL B-RAD

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
21779	DB-RAD 500-2	0.75"	100-500 ft/lbs.	59	11.0 lbs.
21783	DB-RAD 1000-2	0.75"	250-1000 ft/lbs.	19	11.6 lbs.
21787	DB-RAD 1500-2	1.0"	500-1500 ft/lbs.	17	11.8 lbs.

PNEUMATIC SERIES: RAD TV

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
21953	7GX-R TV	0.75"	300-700 ft/lbs.	30	12 lbs.
22076	10GX TV	0.75"	200-1000 ft/lbs.	20	8.0 lbs.
22885	15DX TV	1.0"	300-1500 ft/lbs.	10	8.6 lbs.
21357	34GX TV	1.0"	1000-3400 ft/lbs.	12	20 lbs.

ELECTRIC SERIES: V-RAD SELECT

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE RANGE	RPM	WEIGHT
25627	V-RAD SELECT 500	0.75"	50-500 ft/lbs.	9.5	9.5 lbs.
25628	V-RAD SELECT 1000	0.75"	100-1000 ft/lbs.	5.5	11 lbs.
25629	V-RAD SELECT 1500	1.0"	150-1500 ft/lbs.	5.5	12 lbs.
25630	V-RAD SELECT 2500	1.0"	250-2500 ft/lbs.	3.5	13.5 lbs.



RAD TORQUE SYSTEMS — THERE IS A **BETTER WAY**

MINING
OIL + GAS
AEROSPACE
PETROCHEMICAL
MANUFACTURING



NEW WORLD TECHNOLOGIES INC

30580 PROGRESSIVE WAY | ABBOTSFORD, BC V2T 6Z2 | CANADA

RADTORQUE.COM